


B2401 Dimensions

JIS B2401 is the Japanese Industrial Standard for O-rings.

Manufacturing the O-rings over than the in side diameter 20000mm by Maxmold Polymer Co., Ltd.

SIZE	Nominal(refer.)		Measurements in inches				Measurements in millimeters				SIZE
	ID	W	ID	+/-	W	+/-	ID	+/-	W	+/-	
G-25	1	2/16	0.961	0.006	0.122	0.004	24.4	0.15	3.1	0.10	G-25
G-30	1 3/16	2/16	1.157	0.006	0.122	0.004	29.4	0.15	3.1	0.10	G-30
G-32	1 4/16	2/16	1.236	0.009	0.122	0.005	31.4	0.15	3.1	0.10	G-32
G-35	1 6/16	2/16	1.345	0.006	0.122	0.004	34.4	0.15	3.1	0.10	G-35
G-40	1 9/16	2/16	1.551	0.006	0.122	0.004	39.4	0.15	3.1	0.10	G-40
G-42	1 10/16	2/16	1.630	0.011	0.122	0.005	41.4	0.15	3.1	0.10	G-42
G-45	1 12/16	2/16	1.748	0.010	0.122	0.004	44.4	0.25	3.1	0.10	G-45
G-50	2	2/16	1.945	0.010	0.122	0.004	49.4	0.25	3.1	0.10	G-50
G-52	2 1/16	2/16	2.024	0.014	0.122	0.005	51.4	0.25	3.1	0.10	G-52
G-55	2 3/16	2/16	2.142	0.010	0.122	0.004	54.4	0.25	3.1	0.10	G-55
G-58	2 5/16	2/16	2.260	0.016	0.122	0.005	57.4	0.25	3.1	0.10	G-58
G-60	2 6/16	2/16	2.339	0.010	0.122	0.004	59.4	0.25	3.1	0.10	G-60
G-62	2 7/16	2/16	2.417	0.017	0.122	0.005	61.4	0.25	3.1	0.10	G-62
G-65	2 9/16	2/16	2.535	0.010	0.122	0.004	64.4	0.25	3.1	0.10	G-65
G-68	2 11/16	2/16	2.654	0.019	0.122	0.005	67.4	0.25	3.1	0.10	G-68
G-69	2 12/16	2/16	2.693	0.019	0.122	0.005	68.4	0.25	3.1	0.10	G-69
G-70	2 12/16	2/16	2.732	0.010	0.122	0.004	69.4	0.25	3.1	0.10	G-70
G-72	2 14/16	2/16	2.811	0.020	0.122	0.005	71.4	0.40	3.1	0.10	G-72
G-75	3	2/16	2.929	0.016	0.122	0.004	74.4	0.40	3.1	0.10	G-75
G-80	3 3/16	2/16	3.126	0.016	0.122	0.004	79.4	0.40	3.1	0.10	G-80
G-85	3 6/16	2/16	3.323	0.016	0.122	0.004	84.4	0.40	3.1	0.10	G-85
G-90	3 9/16	2/16	3.520	0.016	0.122	0.004	89.4	0.40	3.1	0.10	G-90
G-95	3 12/16	2/16	3.717	0.016	0.122	0.004	94.4	0.40	3.1	0.10	G-95
G-100	4	2/16	3.913	0.016	0.122	0.004	99.4	0.40	3.1	0.10	G-100
G-105	4 3/16	2/16	4.110	0.016	0.122	0.004	104.4	0.40	3.1	0.10	G-105
G-110	4 6/16	2/16	4.307	0.016	0.122	0.004	109.4	0.40	3.1	0.10	G-110
G-115	4 9/16	2/16	4.504	0.016	0.122	0.004	114.4	0.40	3.1	0.10	G-115
G-120	4 12/16	2/16	4.701	0.016	0.122	0.004	119.4	0.40	3.1	0.10	G-120
G-125	5	2/16	4.898	0.016	0.122	0.004	124.4	0.40	3.1	0.10	G-125
G-130	5 3/16	2/16	5.094	0.024	0.122	0.004	129.4	0.60	3.1	0.10	G-130
G-135	5 6/16	2/16	5.291	0.024	0.122	0.004	134.4	0.60	3.1	0.10	G-135
G-140	5 9/16	2/16	5.488	0.024	0.122	0.004	139.4	0.60	3.1	0.10	G-140
G-145	5 12/16	2/16	5.685	0.024	0.122	0.004	144.4	0.60	3.1	0.10	G-145
G-150	6	4/16	5.878	0.024	0.224	0.006	149.3	0.60	5.7	0.15	G-150
G-155	6 3/16	4/16	6.075	0.024	0.224	0.006	154.3	0.60	5.7	0.15	G-155
G-160	6 6/16	4/16	6.272	0.024	0.224	0.006	159.3	0.60	5.7	0.15	G-160
G-165	6 9/16	4/16	6.469	0.024	0.224	0.006	164.3	0.60	5.7	0.15	G-165
G-170	6 12/16	4/16	6.665	0.024	0.224	0.006	169.3	0.60	5.7	0.15	G-170
G-175	7	4/16	6.862	0.024	0.224	0.006	174.3	0.60	5.7	0.15	G-175
G-180	7 3/16	4/16	7.059	0.024	0.224	0.006	179.3	0.60	5.7	0.15	G-180
G-185	7 6/16	4/16	7.256	0.031	0.224	0.006	184.3	0.80	5.7	0.15	G-185
G-190	7 9/16	4/16	7.453	0.031	0.224	0.006	189.3	0.80	5.7	0.15	G-190
G-195	7 12/16	4/16	7.650	0.031	0.224	0.006	194.3	0.80	5.7	0.15	G-195
G-200	8	4/16	7.846	0.031	0.224	0.006	199.3	0.80	5.7	0.15	G-200
G-205	8 3/16	4/16	8.043	0.056	0.224	0.009	204.3	0.80	5.7	0.19	G-205
G-210	8 6/16	4/16	8.240	0.031	0.224	0.006	209.3	0.80	5.7	0.15	G-210
G-215	8 9/16	4/16	8.437	0.059	0.224	0.009	214.3	0.80	5.7	0.19	G-215
G-220	8 12/16	4/16	8.634	0.031	0.224	0.006	219.3	0.80	5.7	0.15	G-220
G-225	9	4/16	8.831	0.062	0.224	0.009	224.3	0.80	5.7	0.19	G-225
G-230	9 3/16	4/16	9.028	0.031	0.224	0.006	229.3	0.80	5.7	0.15	G-230
G-235	9 6/16	4/16	9.224	0.065	0.224	0.009	234.3	0.80	5.7	0.19	G-235

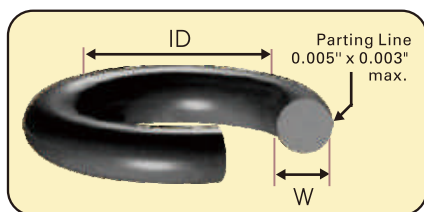

B2401 Dimensions

JIS B2401 is the Japanese Industrial Standard for O-rings.
Manufacturing the O-rings over than the in side diameter 20000mm
by Maxmold Polymer Co., Ltd.


SIZE	Nominal(refer.)		Measurements in inches				Measurements in millimeters				SIZE
	ID	W	ID	+/-	W	+/-	ID	+/-	W	+/-	
G-240	9 9/16	4/16	9.421	0.031	0.224	0.006	239.3	0.80	5.7	0.15	G-240
G-245	9 12/16	4/16	9.618	0.067	0.224	0.009	244.3	0.80	5.7	0.19	G-245
G-250	10	4/16	9.815	0.031	0.224	0.006	249.3	0.80	5.7	0.15	G-250
G-255	10 3/16	4/16	10.012	0.031	0.224	0.006	254.3	0.80	5.7	0.15	G-255
G-260	10 6/16	4/16	10.209	0.031	0.224	0.006	259.3	0.80	5.7	0.15	G-260
G-265	10 9/16	4/16	10.406	0.073	0.224	0.009	264.3	0.80	5.7	0.19	G-265
G-270	10 12/16	4/16	10.602	0.031	0.224	0.006	269.3	0.80	5.7	0.15	G-270
G-275	11	4/16	10.799	0.076	0.224	0.009	274.3	0.80	5.7	0.19	G-275
G-280	11 3/16	4/16	10.996	0.031	0.224	0.006	279.3	0.80	5.7	0.15	G-280
G-285	11 6/16	4/16	11.193	0.078	0.224	0.009	284.3	0.80	5.7	0.19	G-285
G-290	11 9/16	4/16	11.390	0.031	0.224	0.006	289.3	0.80	5.7	0.15	G-290
G-295	11 12/16	4/16	11.587	0.081	0.224	0.009	294.3	0.80	5.7	0.19	G-295
G-300	12	4/16	11.783	0.031	0.224	0.006	299.3	0.80	5.7	0.15	G-300
G-305	12 3/16	4/16	11.980	0.084	0.224	0.009	304.3	1	5.7	0.19	G-305
G-310	12 6/16	4/16	12.177	0.085	0.224	0.009	309.3	1	5.7	0.19	G-310
G-315	12 9/16	4/16	12.374	0.087	0.224	0.009	314.3	1	5.7	0.19	G-315
G-320	12 12/16	4/16	12.571	0.088	0.224	0.009	319.3	1	5.7	0.19	G-320
G-325	13	4/16	12.768	0.089	0.224	0.009	324.3	1	5.7	0.19	G-325
G-330	13 3/16	4/16	12.965	0.091	0.224	0.009	329.3	1	5.7	0.19	G-330
G-335	13 6/16	4/16	13.161	0.092	0.224	0.009	334.3	1	5.7	0.19	G-335
G-340	13 9/16	4/16	13.358	0.094	0.224	0.009	339.3	1	5.7	0.19	G-340
G-345	13 12/16	4/16	13.555	0.095	0.224	0.009	344.3	1	5.7	0.19	G-345
G-350	14	4/16	13.752	0.096	0.224	0.009	349.3	1	5.7	0.19	G-350
G-355	14 3/16	4/16	13.949	0.098	0.224	0.009	354.3	1	5.7	0.19	G-355
G-360	14 6/16	4/16	14.146	0.099	0.224	0.009	359.3	1	5.7	0.19	G-360
G-365	14 9/16	4/16	14.343	0.100	0.224	0.009	364.3	1	5.7	0.19	G-365
G-370	14 12/16	4/16	14.539	0.102	0.224	0.009	369.3	1	5.7	0.19	G-370
G-375	15	4/16	14.736	0.103	0.224	0.009	374.3	1	5.7	0.19	G-375
G-380	15 3/16	4/16	14.933	0.105	0.224	0.009	379.3	1	5.7	0.19	G-380
G-385	15 6/16	4/16	15.130	0.106	0.224	0.009	384.3	1	5.7	0.19	G-385
G-390	15 9/16	4/16	15.327	0.107	0.224	0.009	389.3	1	5.7	0.19	G-390
G-395	15 12/16	4/16	15.524	0.109	0.224	0.009	394.3	1	5.7	0.19	G-395
G-400	16	4/16	15.720	0.110	0.224	0.009	399.3	1	5.7	0.19	G-400
G-405	16 3/16	4/16	15.917	0.111	0.224	0.009	404.3	1	5.7	0.19	G-405
G-410	16 6/16	4/16	16.114	0.113	0.224	0.009	409.3	1	5.7	0.19	G-410
G-415	16 9/16	4/16	16.311	0.114	0.224	0.009	414.3	1	5.7	0.19	G-415
G-420	16 12/16	4/16	16.508	0.116	0.224	0.009	419.3	1	5.7	0.19	G-420
G-425	17	4/16	16.705	0.117	0.224	0.009	424.3	1	5.7	0.19	G-425
G-430	17 3/16	4/16	16.902	0.118	0.224	0.009	429.3	1	5.7	0.19	G-430
G-435	17 6/16	4/16	17.098	0.120	0.224	0.009	434.3	1.4	5.7	0.19	G-435
G-440	17 9/16	4/16	17.295	0.121	0.224	0.009	439.3	1.4	5.7	0.19	G-440
G-450	18	4/16	17.689	0.124	0.224	0.009	449.3	1.4	5.7	0.19	G-450
G-455	18 3/16	4/16	17.886	0.125	0.224	0.009	454.3	1.4	5.7	0.19	G-455
G-460	18 6/16	4/16	18.083	0.127	0.224	0.009	459.3	1.4	5.7	0.19	G-460
G-470	18 12/16	4/16	18.476	0.129	0.224	0.009	469.3	1.4	5.7	0.19	G-470
G-475	19	4/16	18.673	0.131	0.224	0.009	474.3	1.4	5.7	0.19	G-475
G-480	19 3/16	4/16	18.870	0.132	0.224	0.009	479.3	1.4	5.7	0.19	G-480
G-480	19 3/16	4/16	18.870	0.132	0.224	0.009	479.3	1.4	5.7	0.19	G-480

B2401 Dimensions

JIS B2401 is the Japanese Industrial Standard for O-rings.

Manufacturing the O-rings over than the in side diameter 20000mm by Maxmold Polymer Co., Ltd.

SIZE	Nominal(refer.)		Measurements in inches				Measurements in millimeters				SIZE
	ID	W	ID	+/-	W	+/-	ID	+/-	W	+/-	
GS-205	8 3/16	2/16	8.043	0.056	0.122	0.005	204.3	1.8	3.1	0.13	GS-205
GS-215	8 9/16	2/16	8.437	0.059	0.122	0.005	214.3	1.8	3.1	0.13	GS-215
GS-225	9	2/16	8.831	0.062	0.122	0.005	224.3	1.8	3.1	0.13	GS-225
GS-235	9 6/16	2/16	9.224	0.065	0.122	0.005	234.3	1.8	3.1	0.13	GS-235
GS-245	9 12/16	2/16	9.618	0.067	0.122	0.005	244.3	1.8	3.1	0.13	GS-245
GS-265	10 9/16	2/16	10.406	0.073	0.122	0.005	264.3	1.8	3.1	0.13	GS-265
GS-275	11	2/16	10.799	0.076	0.122	0.005	274.3	1.8	3.1	0.13	GS-275
GS-285	11 6/16	2/16	11.193	0.078	0.122	0.005	284.3	1.8	3.1	0.13	GS-285
GS-295	11 12/16	2/16	11.587	0.081	0.122	0.005	294.3	1.8	3.1	0.13	GS-295
GS-305	12 3/16	2/16	11.980	0.084	0.122	0.005	304.3	2	3.1	0.13	GS-305
GS-310	12 6/16	2/16	12.177	0.085	0.122	0.005	309.3	2	3.1	0.13	GS-310
GS-315	12 9/16	2/16	12.374	0.087	0.122	0.005	314.3	2	3.1	0.13	GS-315
GS-320	12 12/16	2/16	12.571	0.088	0.122	0.005	319.3	2	3.1	0.13	GS-320
GS-325	13	2/16	12.768	0.089	0.122	0.005	324.3	2	3.1	0.13	GS-325
GS-330	13 3/16	2/16	12.965	0.091	0.122	0.005	329.3	2	3.1	0.13	GS-330
GS-335	13 6/16	2/16	13.161	0.092	0.122	0.005	334.3	2	3.1	0.13	GS-335
GS-340	13 9/16	2/16	13.358	0.094	0.122	0.005	339.3	2	3.1	0.13	GS-340
GS-345	13 12/16	2/16	13.555	0.095	0.122	0.005	344.3	2	3.1	0.13	GS-345
GS-350	14	2/16	13.752	0.096	0.122	0.005	349.3	2	3.1	0.13	GS-350
GS-355	14 3/16	2/16	13.949	0.098	0.122	0.005	354.3	2	3.1	0.13	GS-355
GS-360	14 6/16	2/16	14.146	0.099	0.122	0.005	359.3	2	3.1	0.13	GS-360
GS-365	14 9/16	2/16	14.343	0.100	0.122	0.005	364.3	2	3.1	0.13	GS-365
GS-370	14 12/16	2/16	14.539	0.102	0.122	0.005	369.3	2	3.1	0.13	GS-370
GS-375	15	2/16	14.736	0.103	0.122	0.005	374.3	2	3.1	0.13	GS-375
GS-380	15 3/16	2/16	14.933	0.105	0.122	0.005	379.3	2	3.1	0.13	GS-380
GS-385	15 6/16	2/16	15.130	0.106	0.122	0.005	384.3	2	3.1	0.13	GS-385
GS-390	15 9/16	2/16	15.327	0.107	0.122	0.005	389.3	2	3.1	0.13	GS-390
GS-395	15 12/16	2/16	15.524	0.109	0.122	0.005	394.3	2	3.1	0.13	GS-395
GS-400	16	2/16	15.720	0.110	0.122	0.005	399.3	2	3.1	0.13	GS-400
GS-405	16 3/16	2/16	15.917	0.111	0.122	0.005	404.3	2	3.1	0.13	GS-405
GS-410	16 6/16	2/16	16.114	0.113	0.122	0.005	409.3	2	3.1	0.13	GS-410
GS-415	16 9/16	2/16	16.311	0.114	0.122	0.005	414.3	2	3.1	0.13	GS-415
GS-420	16 12/16	2/16	16.508	0.116	0.122	0.005	419.3	2	3.1	0.13	GS-420
GS-425	17	2/16	16.705	0.117	0.122	0.005	424.3	2	3.1	0.13	GS-425
GS-430	17 3/16	2/16	16.902	0.118	0.122	0.005	429.3	2	3.1	0.13	GS-430
GS-435	17 6/16	2/16	17.098	0.120	0.122	0.005	434.3	2.4	3.1	0.13	GS-435
GS-440	17 9/16	2/16	17.295	0.121	0.122	0.005	439.3	2.4	3.1	0.13	GS-440
GS-450	18	2/16	17.689	0.124	0.122	0.005	449.3	2.4	3.1	0.13	GS-450
GS-455	18 3/16	2/16	17.886	0.125	0.122	0.005	454.3	2.4	3.1	0.13	GS-455
GS-460	18 6/16	2/16	18.083	0.127	0.122	0.005	459.3	2.4	3.1	0.13	GS-460
GS-470	18 12/16	2/16	18.476	0.129	0.122	0.005	469.3	2.4	3.1	0.13	GS-470
GS-475	19	2/16	18.673	0.131	0.122	0.005	474.3	2.4	3.1	0.13	GS-475
GS-480	19 3/16	2/16	18.870	0.132	0.122	0.005	479.3	2.4	3.1	0.13	GS-480

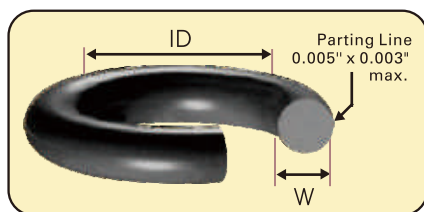

B2401 Dimensions

JIS B2401 is the Japanese Industrial Standard for O-rings.
Manufacturing the O-rings over than the in side diameter 20000mm
by Maxmold Polymer Co., Ltd.


SIZE	Nominal(refer.)		Measurements in inches				Measurements in millimeters				SIZE
	ID	W	ID	+/-	W	+/-	ID	+/-	W	+/-	
P-3	2/16	1/16	0.110	0.005	0.075	0.003	2.8	0.12	1.9	0.07	P-3
P-4	2/16	1/16	0.150	0.005	0.075	0.003	3.8	0.12	1.9	0.07	P-4
P-5	3/16	1/16	0.189	0.005	0.075	0.003	4.8	0.12	1.9	0.07	P-5
P-6	4/16	1/16	0.228	0.005	0.075	0.003	5.8	0.12	1.9	0.07	P-6
P-7	4/16	1/16	0.268	0.005	0.075	0.003	6.8	0.12	1.9	0.07	P-7
P-8	5/16	1/16	0.307	0.005	0.075	0.003	7.8	0.12	1.9	0.07	P-8
P-9	6/16	1/16	0.346	0.005	0.075	0.003	8.8	0.12	1.9	0.07	P-9
P-10	6/16	1/16	0.386	0.005	0.075	0.003	9.8	0.12	1.9	0.07	P-10
P-10A	6/16	2/16	0.386	0.005	0.094	0.003	9.8	0.12	2.4	0.07	P-10A
P-11	7/16	2/16	0.425	0.005	0.094	0.003	10.8	0.12	2.4	0.07	P-11
P-11.2	7/16	2/16	0.433	0.005	0.094	0.003	10.8	0.12	2.4	0.07	P-11.2
P-12	8/16	2/16	0.465	0.005	0.094	0.003	11.8	0.12	2.4	0.07	P-12
P-12.5	8/16	2/16	0.484	0.005	0.094	0.003	12.3	0.12	2.4	0.07	P-12.5
P-14	9/16	2/16	0.543	0.005	0.094	0.003	13.8	0.12	2.4	0.07	P-14
P-15	9/16	2/16	0.583	0.005	0.094	0.003	14.8	0.12	2.4	0.07	P-15
P-16	10/16	2/16	0.622	0.005	0.094	0.003	15.8	0.12	2.4	0.07	P-16
P-17	11/16	2/16	0.661	0.005	0.094	0.004	16.8	0.12	2.4	0.07	P-17
P-18	11/16	2/16	0.701	0.005	0.094	0.003	17.8	0.12	2.4	0.07	P-18
P-19	12/16	2/16	0.740	0.005	0.094	0.004	18.8	0.12	2.4	0.07	P-19
P-20	13/16	2/16	0.780	0.006	0.094	0.003	19.8	0.15	2.4	0.07	P-20
P-21	13/16	2/16	0.819	0.006	0.094	0.003	20.8	0.15	2.4	0.07	P-21
P-22	14/16	2/16	0.858	0.006	0.094	0.003	21.8	0.15	2.4	0.07	P-22
P-22A	14/16	2/16	0.854	0.006	0.138	0.004	21.7	0.15	3.5	0.10	P-22A
P-22.4	14/16	2/16	0.870	0.006	0.138	0.004	22.1	0.15	3.5	0.10	P-22.4
P-23	15/16	2/16	0.898	0.006	0.138	0.006	22.8	0.15	3.5	0.10	P-23
P-24	15/16	2/16	0.933	0.006	0.138	0.004	23.7	0.15	3.5	0.10	P-24
P-25	1	2/16	0.972	0.006	0.138	0.004	24.7	0.15	3.5	0.10	P-25
P-25.5	1	2/16	0.992	0.006	0.138	0.004	25.2	0.15	3.5	0.10	P-25.5
P-26	1	2/16	1.012	0.006	0.138	0.004	25.7	0.15	3.5	0.10	P-26
P-28	1 2/16	2/16	1.091	0.006	0.138	0.004	27.7	0.15	3.5	0.10	P-28
P-29	1 2/16	2/16	1.130	0.006	0.138	0.004	28.7	0.15	3.5	0.10	P-29
P-29.5	1 3/16	2/16	1.150	0.006	0.138	0.004	29.2	0.15	3.5	0.10	P-29.5
P-30	1 3/16	2/16	1.169	0.006	0.138	0.004	29.7	0.15	3.5	0.10	P-30
P-31	1 4/16	2/16	1.209	0.006	0.138	0.004	30.7	0.15	3.5	0.10	P-31
P-31.5	1 4/16	2/16	1.228	0.006	0.138	0.004	31.2	0.15	3.5	0.10	P-31.5
P-32	1 4/16	2/16	1.248	0.006	0.138	0.004	31.7	0.15	3.5	0.10	P-32
P-34	1 6/16	2/16	1.327	0.006	0.138	0.004	33.7	0.15	3.5	0.10	P-34
P-35	1 6/16	2/16	1.366	0.006	0.138	0.004	34.7	0.15	3.5	0.10	P-35
P-35.5	1 7/16	2/16	1.386	0.006	0.138	0.004	35.2	0.15	3.5	0.10	P-35.5
P-36	1 7/16	2/16	1.406	0.006	0.138	0.004	35.7	0.15	3.5	0.10	P-36
P-38	1 8/16	2/16	1.484	0.006	0.138	0.004	37.7	0.15	3.5	0.10	P-38
P-39	1 9/16	2/16	1.524	0.006	0.138	0.004	38.7	0.15	3.5	0.10	P-39
P-40	1 9/16	2/16	1.563	0.006	0.138	0.004	39.7	0.15	3.5	0.10	P-40
P-41	1 10/16	2/16	1.602	0.010	0.138	0.004	40.7	0.25	3.5	0.10	P-41
P-42	1 11/16	2/16	1.642	0.010	0.138	0.004	41.7	0.25	3.5	0.10	P-42
P-43	1 11/16	2/16	1.681	0.012	0.138	0.006	42.7	0.25	3.5	0.10	P-43
P-44	1 12/16	2/16	1.720	0.010	0.138	0.004	43.7	0.25	3.5	0.10	P-44
P-45	1 13/16	2/16	1.760	0.010	0.138	0.004	44.7	0.25	3.5	0.10	P-45
P-46	1 13/16	2/16	1.799	0.010	0.138	0.004	45.7	0.25	3.5	0.10	P-46
P-47A	1 14/16	4/16	1.839	0.013	0.224	0.009	46.7	0.25	5.7	0.10	P-47A
P-48	1 15/16	2/16	1.878	0.010	0.138	0.004	47.7	0.25	3.5	0.10	P-48

B2401 Dimensions

JIS B2401 is the Japanese Industrial Standard for O-rings.

Manufacturing the O-rings over than the in side diameter 20000mm by Maxmold Polymer Co., Ltd.

SIZE	Nominal(refer.)		Measurements in inches				Measurements in millimeters				SIZE
	ID	W	ID	+/-	W	+/-	ID	+/-	W	+/-	
P-49	1 15/16	2/16	1.917	0.010	0.138	0.004	48.7	0.25	3.5	0.10	P-49
P-50	2	2/16	1.957	0.010	0.138	0.004	49.7	0.25	3.5	0.10	P-50
P-48A	1 14/16	4/16	1.874	0.010	0.224	0.006	47.6	0.25	5.7	0.15	P-48A
P-50A	2	4/16	1.953	0.010	0.224	0.006	49.6	0.25	5.7	0.15	P-50A
P-52	2 1/16	4/16	2.031	0.010	0.224	0.006	51.6	0.25	5.7	0.2	P-52
P-53	2 2/16	4/16	2.071	0.010	0.224	0.006	52.6	0.25	5.7	0.2	P-53
P-55	2 3/16	4/16	2.150	0.010	0.224	0.006	54.6	0.25	5.7	0.2	P-55
P-56	2 4/16	4/16	2.189	0.010	0.224	0.006	55.6	0.25	5.7	0.2	P-56
P-58	2 5/16	4/16	2.268	0.010	0.224	0.006	57.6	0.25	5.7	0.2	P-58
P-60	2 6/16	4/16	2.346	0.010	0.224	0.006	59.6	0.25	5.7	0.2	P-60
P-62	2 7/16	4/16	2.425	0.010	0.224	0.006	61.6	0.25	5.7	0.2	P-62
P-63	2 8/16	4/16	2.465	0.010	0.224	0.006	62.6	0.25	5.7	0.2	P-63
P-65	2 9/16	4/16	2.543	0.010	0.224	0.006	64.6	0.25	5.7	0.2	P-65
P-67	2 11/16	4/16	2.622	0.010	0.224	0.006	66.6	0.25	5.7	0.2	P-67
P-70	2 13/16	4/16	2.740	0.010	0.224	0.006	69.6	0.25	5.7	0.2	P-70
P-71	2 13/16	4/16	2.780	0.016	0.224	0.006	70.6	0.40	5.7	0.2	P-71
P-75	3	4/16	2.937	0.016	0.224	0.006	74.6	0.40	5.7	0.2	P-75
P-80	3 3/16	4/16	3.134	0.016	0.224	0.006	79.6	0.40	5.7	0.2	P-80
P-85	3 6/16	4/16	3.331	0.016	0.224	0.006	84.6	0.40	5.7	0.2	P-85
P-90	3 9/16	4/16	3.528	0.016	0.224	0.006	89.6	0.40	5.7	0.2	P-90
P-95	3 13/16	4/16	3.724	0.016	0.224	0.006	94.6	0.40	5.7	0.2	P-95
P-100	4	4/16	3.921	0.016	0.224	0.006	99.6	0.40	5.7	0.2	P-100
P-102	4 1/16	4/16	4.000	0.016	0.224	0.006	101.6	0.40	5.7	0.2	P-102
P-105	4 3/16	4/16	4.118	0.016	0.224	0.006	104.6	0.40	5.7	0.2	P-105
P-110	4 6/16	4/16	4.315	0.016	0.224	0.006	109.6	0.40	5.7	0.2	P-110
P-112	4 7/16	4/16	4.394	0.016	0.224	0.006	111.6	0.40	5.7	0.2	P-112
P-115	4 9/16	4/16	4.512	0.016	0.224	0.006	114.6	0.40	5.7	0.2	P-115
P-120	4 13/16	4/16	4.709	0.016	0.224	0.006	119.6	0.40	5.7	0.2	P-120
P-125	5	4/16	4.906	0.016	0.224	0.006	124.6	0.40	5.7	0.2	P-125
P-130	5 3/16	4/16	5.102	0.024	0.224	0.006	129.6	0.60	5.7	0.2	P-130
P-132	5 4/16	4/16	5.181	0.024	0.224	0.006	131.6	0.60	5.7	0.2	P-132
P-135	5 6/16	4/16	5.299	0.024	0.224	0.006	134.6	0.60	5.7	0.2	P-135
P-140	5 9/16	4/16	5.496	0.024	0.224	0.006	139.6	0.60	5.7	0.2	P-140
P-145	5 13/16	4/16	5.693	0.024	0.224	0.006	144.6	0.60	5.7	0.2	P-145
P-150	6	4/16	5.890	0.024	0.224	0.006	149.6	0.60	5.7	0.2	P-150
P-150A	6	5/16	5.886	0.024	0.331	0.006	149.5	0.60	8.4	0.2	P-150A
P-155	6 3/16	5/16	6.083	0.024	0.331	0.006	154.5	0.60	8.4	0.2	P-155
P-160	6 6/16	5/16	6.280	0.024	0.331	0.006	159.5	0.60	8.4	0.2	P-160
P-165	6 9/16	5/16	6.476	0.024	0.331	0.006	164.5	0.60	8.4	0.2	P-165
P-170	6 12/16	5/16	6.673	0.024	0.331	0.006	169.5	0.60	8.4	0.2	P-170
P-175	7	5/16	6.870	0.024	0.331	0.006	174.5	0.60	8.4	0.2	P-175
P-180	7 3/16	5/16	7.067	0.024	0.331	0.006	179.5	0.60	8.4	0.2	P-180
P-185	7 6/16	5/16	7.264	0.031	0.331	0.006	184.5	0.80	8.4	0.2	P-185
P-190	7 9/16	5/16	7.461	0.031	0.331	0.006	189.5	0.80	8.4	0.2	P-190
P-195	7 12/16	5/16	7.657	0.031	0.331	0.006	194.5	0.80	8.4	0.2	P-195
P-200	8	5/16	7.854	0.031	0.331	0.006	199.5	0.80	8.4	0.2	P-200
P-205	8 3/16	5/16	8.051	0.031	0.331	0.006	204.5	0.80	8.4	0.2	P-205
P-209	8 5/16	5/16	8.209	0.031	0.331	0.006	208.5	0.80	8.4	0.2	P-209
P-210	8 6/16	5/16	8.248	0.031	0.331	0.006	209.5	0.80	8.4	0.2	P-210
P-215	8 9/16	5/16	8.445	0.031	0.331	0.006	214.5	0.80	8.4	0.2	P-215
P-220	8 12/16	5/16	8.642	0.031	0.331	0.006	219.5	0.80	8.4	0.2	P-220

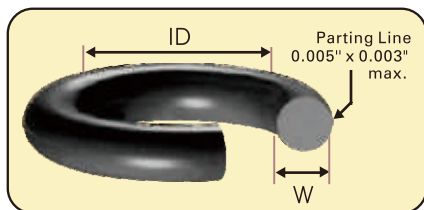

B2401 Dimensions

JIS B2401 is the Japanese Industrial Standard for O-rings.
Manufacturing the O-rings over than the in side diameter 20000mm
by Maxmold Polymer Co., Ltd.


SIZE	Nominal (refer.)		Measurements in inches				Measurements in millimeters				SIZE
	ID	W	ID	+/-	W	+/-	ID	+/-	W	+/-	
P-225	9	5/16	8.839	0.031	0.331	0.006	224.5	0.80	8.4	0.2	P-225
P-230	9 3/16	5/16	9.035	0.031	0.331	0.006	229.5	0.80	8.4	0.2	P-230
P-235	9 6/16	5/16	9.232	0.031	0.331	0.006	234.5	0.80	8.4	0.15	P-235
P-240	9 9/16	5/16	9.429	0.031	0.331	0.006	239.5	0.80	8.4	0.15	P-240
P-245	9 12/16	5/16	9.626	0.031	0.331	0.006	244.5	0.80	8.4	0.15	P-245
P-250	10	5/16	9.823	0.031	0.331	0.006	249.5	0.80	8.4	0.15	P-250
P-255	10 3/16	5/16	10.020	0.031	0.331	0.006	254.5	0.80	8.4	0.15	P-255
P-260	10 6/16	5/16	10.217	0.031	0.331	0.006	259.5	0.80	8.4	0.15	P-260
P-265	10 9/16	5/16	10.413	0.031	0.331	0.006	264.5	0.80	8.4	0.15	P-265
P-270	10 12/16	5/16	10.610	0.031	0.331	0.006	269.5	0.80	8.4	0.15	P-270
P-275	11	5/16	10.807	0.031	0.331	0.006	274.5	0.80	8.4	0.15	P-275
P-280	11 3/16	5/16	11.004	0.031	0.331	0.006	279.5	0.80	8.4	0.15	P-280
P-285	11 6/16	5/16	11.201	0.031	0.331	0.006	284.5	0.80	8.4	0.15	P-285
P-290	11 9/16	5/16	11.398	0.031	0.331	0.006	289.5	0.80	8.4	0.15	P-290
P-295	11 12/16	5/16	11.594	0.031	0.331	0.006	294.5	0.80	8.4	0.15	P-295
P-300	12	5/16	11.791	0.031	0.331	0.006	299.5	0.80	8.4	0.15	P-300
P-310	12 6/16	5/16	12.185	0.085	0.331	0.013	309.5	1.00	8.4	0.15	P-310
P-315	12 9/16	5/16	12.382	0.039	0.331	0.006	314.5	1.00	8.4	0.15	P-315
P-320	12 12/16	5/16	12.579	0.039	0.331	0.006	319.5	1.00	8.4	0.15	P-320
P-325	13	5/16	12.776	0.089	0.331	0.013	324.5	1.00	8.4	0.15	P-325
P-330	13 3/16	5/16	12.972	0.091	0.331	0.013	329.5	1.00	8.4	0.15	P-330
P-335	13 6/16	5/16	13.169	0.039	0.331	0.006	334.5	1.00	8.4	0.15	P-335
P-340	13 9/16	5/16	13.366	0.039	0.331	0.006	339.5	1.00	8.4	0.15	P-340
P-345	13 12/16	5/16	13.563	0.095	0.331	0.013	344.5	1.00	8.4	0.15	P-345
P-350	14	5/16	13.760	0.096	0.331	0.013	349.5	1.00	8.4	0.15	P-350
P-355	14 3/16	5/16	13.957	0.039	0.331	0.006	354.5	1.00	8.4	0.15	P-355
P-360	14 6/16	5/16	14.154	0.039	0.331	0.006	359.5	1.00	8.4	0.15	P-360
P-365	14 9/16	5/16	14.350	0.100	0.331	0.013	364.5	1.00	8.4	0.15	P-365
P-370	14 12/16	5/16	14.547	0.102	0.331	0.013	369.5	1.00	8.4	0.15	P-370
P-375	15	5/16	14.744	0.039	0.331	0.006	374.5	1.00	8.4	0.15	P-375
P-380	15 3/16	5/16	14.941	0.105	0.331	0.013	379.5	1.00	8.4	0.15	P-380
P-385	15 6/16	5/16	15.138	0.039	0.331	0.006	384.5	1.00	8.4	0.15	P-385
P-390	15 9/16	5/16	15.335	0.107	0.331	0.013	389.5	1.00	8.4	0.15	P-390
P-395	15 12/16	5/16	15.531	0.109	0.331	0.013	394.5	1.00	8.4	0.15	P-395
P-400	16	5/16	15.728	0.039	0.331	0.006	399.5	1.00	8.4	0.15	P-400
P-405	16 3/16	5/16	15.925	0.111	0.331	0.013	404.5	1.00	8.4	0.15	P-405
P-410	16 6/16	5/16	16.122	0.113	0.331	0.013	409.5	1.00	8.4	0.15	P-410
P-420	16 12/16	5/16	16.516	0.116	0.331	0.013	419.5	1.00	8.4	0.15	P-420

B2401 Dimensions

JIS B2401 is the Japanese Industrial Standard for O-rings.

Manufacturing the O-rings over than the in side diameter 20000mm by Maxmold Polymer Co., Ltd.

SIZE	Nominal(refer.)		Measurements in inches				Measurements in millimeters				SIZE
	ID	W	ID	+/-	W	+/-	ID	+/-	W	+/-	
V-15	9/16	3/16	0.571	0.006	0.157	0.004	14.5	0.15	4.0	0.10	V-15
V-24	15/16	3/16	0.925	0.006	0.157	0.004	23.5	0.15	4.0	0.10	V-24
V-25	1	3/16	0.980	0.006	0.157	0.004	24.5	0.15	4.0	0.10	V-25
V-34	1 5/16	3/16	1.340	0.006	0.157	0.004	33.5	0.15	4.0	0.10	V-34
V-40	1 9/16	3/16	1.580	0.006	0.157	0.004	39.5	0.15	4.0	0.10	V-40
V-50	2	3/16	1.980	0.010	0.157	0.004	49.5	0.25	4.0	0.10	V-50
V-55	2 3/16	3/16	2.180	0.010	0.157	0.004	54.5	0.25	4.0	0.10	V-55
V-63	2 8/16	3/16	2.500	0.010	0.157	0.004	62.5	0.25	4.0	0.10	V-63
V-70	2 12/16	3/16	2.760	0.010	0.157	0.004	69.0	0.25	4.0	0.10	V-70
V-85	3 6/16	3/16	3.360	0.024	0.157	0.004	84.0	0.40	4.0	0.10	V-85
V-100	3 15/16	3/16	3.960	0.024	0.157	0.004	99.0	0.40	4.0	0.10	V-100
V-103	4 2/16	3/16	4.100	0.024	0.157	0.004	102.5	0.40	4.0	0.10	V-103
V-110	4 6/16	3/16	4.360	0.024	0.157	0.004	109.0	0.40	4.0	0.10	V-110
V-120	4 12/16	3/16	4.760	0.024	0.157	0.004	119.0	0.40	4.0	0.10	V-120
V-126	5	3/16	5.020	0.024	0.157	0.004	125.5	0.60	4.0	0.10	V-126
V-142	5 10/16	3/16	5.620	0.024	0.157	0.004	140.5	0.60	4.0	0.10	V-142
V-150	5 15/16	3/16	5.940	0.024	0.157	0.004	148.5	0.60	4.0	0.10	V-150
V-175	6 15/16	3/16	6.811	0.024	0.157	0.004	173.0	0.60	4.0	0.10	V-175
V-185	7 5/16	3/16	7.205	0.050	0.157	0.006	183.0	0.60	4.0	0.13	V-185
V-190	7 8/16	3/16	7.402	0.052	0.157	0.006	188.0	0.60	4.0	0.13	V-190
V-195	7 12/16	3/16	7.598	0.053	0.157	0.006	193.0	0.60	4.0	0.13	V-195
V-210	8 2/16	3/16	7.992	0.056	0.157	0.006	203.0	0.60	4.0	0.13	V-210
V-215	8 8/16	3/16	8.386	0.059	0.157	0.006	213.0	0.60	4.0	0.13	V-215
V-220	8 12/16	3/16	8.583	0.060	0.157	0.006	218.0	0.60	4.0	0.13	V-220
V-250	9 14/16	4/16	9.744	0.068	0.236	0.009	247.5	0.80	6.0	0.20	V-250
V-275	10 14/16	4/16	10.709	0.031	0.236	0.006	272.0	0.80	6.0	0.20	V-275
V-280	11 1/16	4/16	10.906	0.076	0.236	0.009	277.0	0.80	6.0	0.20	V-280
V-290	11 8/16	4/16	11.299	0.079	0.236	0.009	287.0	0.80	6.0	0.20	V-290
V-295	11 11/16	4/16	11.496	0.080	0.236	0.009	292.0	0.80	6.0	0.20	V-295
V-300	11 14/16	4/16	11.693	0.082	0.236	0.009	297.0	0.80	6.0	0.20	V-300
V-305	12 1/16	4/16	11.890	0.083	0.236	0.009	302.0	1.00	6.0	0.20	V-305
V-315	12 8/16	4/16	12.283	0.086	0.236	0.009	312.0	1.00	6.0	0.20	V-315
V-320	12 11/16	4/16	12.480	0.087	0.236	0.009	317.0	1.00	6.0	0.20	V-320
V-325	12 14/16	4/16	12.657	0.039	0.236	0.006	321.5	1.00	6.0	0.15	V-325
V-330	13 1/16	4/16	12.854	0.090	0.236	0.009	326.5	1.00	6.0	0.20	V-330
V-340	13 7/16	4/16	13.248	0.093	0.236	0.009	336.5	1.00	6.0	0.20	V-340
V-345	13 11/16	4/16	13.445	0.094	0.236	0.009	341.5	1.00	6.0	0.20	V-345
V-350	13 14/16	4/16	13.642	0.095	0.236	0.009	346.5	1.00	6.0	0.20	V-350
V-355	14 1/16	4/16	13.839	0.097	0.236	0.009	351.5	1.00	6.0	0.20	V-355
V-365	14 7/16	4/16	14.232	0.100	0.236	0.009	361.5	1.00	6.0	0.20	V-365
V-370	14 11/16	4/16	14.429	0.101	0.236	0.009	366.5	1.00	6.0	0.20	V-370
V-375	14 14/16	4/16	14.626	0.102	0.236	0.009	371.5	1.00	6.0	0.20	V-375
V-390	15 7/16	4/16	15.197	0.106	0.236	0.009	386.0	1.00	6.0	0.20	V-390
V-395	15 10/16	4/16	15.394	0.108	0.236	0.009	391.0	1.00	6.0	0.20	V-395
V-400	15 13/16	4/16	15.591	0.109	0.236	0.009	396.0	1.00	6.0	0.20	V-400
V-405	16 1/16	4/16	15.787	0.111	0.236	0.009	401.0	1.00	6.0	0.20	V-405
V-415	16 7/16	4/16	16.181	0.113	0.236	0.009	411.0	1.00	6.0	0.20	V-415
V-420	16 10/16	4/16	16.378	0.115	0.236	0.009	416.0	1.00	6.0	0.20	V-420
V-425	16 13/16	4/16	16.575	0.116	0.236	0.009	421.0	1.00	6.0	0.20	V-425
V-430	17	4/16	16.752	0.047	0.236	0.006	425.5	1.20	6.0	0.15	V-430
V-480	19	6/16	18.701	0.047	0.394	0.012	475.0	1.20	10.0	0.30	V-480

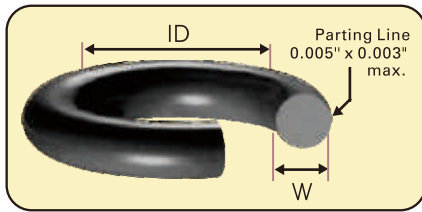

B2401 Dimensions

JIS B2401 is the Japanese Industrial Standard for O-rings.
Manufacturing the O-rings over than the in side diameter 20000mm
by Maxmold Polymer Co., Ltd.


SIZE	Nominal (refer.)		Measurements in inches				Measurements in millimeters				SIZE
	ID	W	ID	+/-	W	+/-	ID	+/-	W	+/-	
V-530	21	6/16	20.650	0.063	0.394	0.012	524.5	1.60	10.0	0.30	V-530
V-585	23 3/16	6/16	22.795	0.063	0.394	0.012	579.0	1.60	10.0	0.30	V-585
V-640	25 5/16	6/16	24.941	0.063	0.394	0.012	633.5	1.60	10.0	0.30	V-640
V-690	27 5/16	6/16	26.890	0.063	0.394	0.012	683.0	1.60	10.0	0.30	V-690
V-740	29 5/16	6/16	28.839	0.079	0.394	0.012	732.5	2.00	10.0	0.30	V-740
V-790	31 4/16	6/16	30.787	0.079	0.394	0.012	782.0	2.00	10.0	0.30	V-790
V-845	33 7/16	6/16	32.933	0.079	0.394	0.012	836.5	2.00	10.0	0.30	V-845
V-950	37 10/16	6/16	37.028	0.098	0.394	0.012	940.5	2.50	10.0	0.30	V-950
V-1055	41 12/16	6/16	41.102	0.118	0.394	0.012	1044.0	3.00	10.0	0.30	V-1055

B2401 Dimensions

JIS B2401 is the Japanese Industrial Standard for O-rings.

Manufacturing the O-rings over than the in side diameter 20000mm by Maxmold Polymer Co., Ltd.

SIZE	Nominal(refer.)		Measurements in inches				Measurements in millimeters				SIZE
	ID	W	ID	+/-	W	+/-	ID	+/-	W	+/-	
S-2	1/16	1/16	0.059	0.000	0.059	0.002	1.50	0.13	1.50	0.05	S-2
S-3	2/16	1/16	0.098	0.005	0.059	0.003	2.50	0.13	1.50	0.08	S-3
S-4	2/16	1/16	0.138	0.005	0.059	0.003	3.50	0.13	1.50	0.08	S-4
S-5	3/16	1/16	0.177	0.005	0.059	0.003	4.50	0.13	1.50	0.08	S-5
S-6	4/16	1/16	0.217	0.005	0.059	0.003	5.50	0.13	1.50	0.08	S-6
S-7	4/16	1/16	0.256	0.005	0.059	0.003	6.50	0.13	1.50	0.08	S-7
S-8	5/16	1/16	0.295	0.005	0.059	0.003	7.50	0.13	1.50	0.08	S-8
S-9	5/16	1/16	0.335	0.005	0.059	0.003	8.50	0.13	1.50	0.08	S-9
S-10	6/16	1/16	0.374	0.005	0.059	0.003	9.50	0.13	1.50	0.08	S-10
S-11.2	7/16	1/16	0.421	0.005	0.059	0.003	10.70	0.13	1.50	0.08	S-11.2
S-12	7/16	1/16	0.453	0.005	0.059	0.003	11.50	0.13	1.50	0.08	S-12
S-12.5	8/16	1/16	0.472	0.005	0.059	0.003	12.00	0.13	1.50	0.08	S-12.5
S-13	8/16	1/16	0.492	0.003	0.059	0.002	12.50	0.23	1.50	0.05	S-13
S-14	9/16	1/16	0.531	0.009	0.059	0.003	13.50	0.23	1.50	0.08	S-14
S-15	9/16	1/16	0.571	0.009	0.059	0.003	14.50	0.23	1.50	0.08	S-15
S-16	10/16	1/16	0.610	0.009	0.059	0.003	15.50	0.23	1.50	0.08	S-16
S-18	11/16	1/16	0.689	0.009	0.059	0.003	17.50	0.23	1.50	0.08	S-18
S-20	12/16	1/16	0.768	0.009	0.059	0.003	19.50	0.23	1.50	0.08	S-20
S-22	14/16	1/16	0.846	0.009	0.059	0.003	21.50	0.23	1.50	0.08	S-22
S-22.4	14/16	1/16	0.862	0.009	0.079	0.003	21.90	0.23	2.00	0.08	S-22.4
S-24	15/16	1/16	0.925	0.009	0.079	0.003	23.50	0.23	2.00	0.08	S-24
S-25	1	1/16	0.965	0.010	0.079	0.003	24.50	0.25	2.00	0.08	S-25
S-26	1	1/16	1.004	0.010	0.079	0.003	25.50	0.25	2.00	0.08	S-26
S-28	1 2/16	1/16	1.083	0.010	0.079	0.003	27.50	0.25	2.00	0.08	S-28
S-29	1 2/16	1/16	1.122	0.011	0.079	0.003	28.50	0.28	2.00	0.08	S-29
S-30	1 3/16	1/16	1.161	0.011	0.079	0.003	29.50	0.28	2.00	0.08	S-30
S-31.5	1 4/16	1/16	1.220	0.011	0.079	0.003	31.00	0.28	2.00	0.08	S-31.5
S-32	1 4/16	1/16	1.240	0.011	0.079	0.003	31.50	0.28	2.00	0.08	S-32
S-34	1 5/16	1/16	1.319	0.013	0.079	0.003	33.50	0.33	2.00	0.08	S-34
S-35	1 6/16	1/16	1.358	0.013	0.079	0.003	34.50	0.33	2.00	0.08	S-35
S-35.5	1 6/16	1/16	1.378	0.013	0.079	0.003	35.00	0.33	2.00	0.08	S-35.5
S-36	1 7/16	1/16	1.398	0.013	0.079	0.003	35.50	0.33	2.00	0.08	S-36
S-38	1 8/16	1/16	1.476	0.013	0.079	0.003	37.50	0.33	2.00	0.08	S-38
S-39	1 9/16	1/16	1.516	0.013	0.079	0.003	38.50	0.33	2.00	0.08	S-39
S-40	1 9/16	1/16	1.555	0.013	0.079	0.003	39.50	0.33	2.00	0.08	S-40
S-42	1 11/16	1/16	1.634	0.015	0.079	0.003	41.50	0.38	2.00	0.08	S-42
S-44	1 12/16	1/16	1.713	0.015	0.079	0.003	43.50	0.38	2.00	0.08	S-44
S-45	1 12/16	1/16	1.752	0.015	0.079	0.003	44.50	0.38	2.00	0.08	S-45
S-46	1 13/16	1/16	1.791	0.015	0.079	0.003	45.50	0.38	2.00	0.08	S-46
S-48	1 14/16	1/16	1.870	0.018	0.079	0.003	47.50	0.46	2.00	0.08	S-48
S-50	2	1/16	1.949	0.018	0.079	0.003	49.50	0.46	2.00	0.08	S-50
S-53	2 2/16	1/16	2.067	0.018	0.079	0.003	52.50	0.46	2.00	0.08	S-53
S-55	2 3/16	1/16	2.146	0.018	0.079	0.003	54.50	0.46	2.00	0.08	S-55
S-56	2 4/16	1/16	2.185	0.018	0.079	0.003	55.50	0.46	2.00	0.08	S-56
S-60	2 6/16	1/16	2.343	0.018	0.079	0.003	59.50	0.46	2.00	0.08	S-60
S-63	2 8/16	1/16	2.461	0.018	0.079	0.003	62.50	0.46	2.00	0.08	S-63
S-65	2 9/16	1/16	2.539	0.020	0.079	0.003	64.50	0.51	2.00	0.08	S-65
S-67	2 11/16	1/16	2.618	0.020	0.079	0.003	66.50	0.51	2.00	0.08	S-67
S-70	2 12/16	1/16	2.736	0.020	0.079	0.003	69.50	0.51	2.00	0.08	S-70
S-71	2 13/16	1/16	2.776	0.020	0.079	0.003	70.50	0.51	2.00	0.08	S-71
S-75	3	1/16	2.933	0.024	0.079	0.003	74.50	0.61	2.00	0.08	S-75

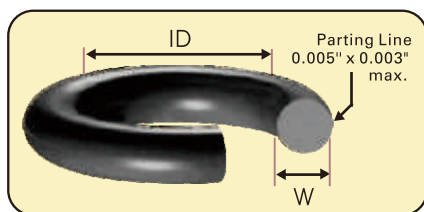

B2401 Dimensions

JIS B2401 is the Japanese Industrial Standard for O-rings.
Manufacturing the O-rings over than the in side diameter 20000mm
by Maxmold Polymer Co., Ltd.

SIZE		Nominal(refer.)		Measurements in inches				Measurements in millimeters				SIZE
		ID	W	ID	+/-	W	+/-	ID	+/-	W	+/-	
	S-80	3 3/16	1/16	3.130	0.024	0.079	0.003	79.50	0.61	2.00	0.08	S-80
	S-85	3 6/16	1/16	3.327	0.024	0.079	0.003	84.50	0.61	2.00	0.08	S-85
	S-90	3 9/16	1/16	3.524	0.027	0.079	0.003	89.50	0.69	2.00	0.08	S-90
	S-95	3 12/16	1/16	3.720	0.027	0.079	0.003	94.50	0.69	2.00	0.08	S-95
	S-100	4	1/16	3.917	0.027	0.079	0.003	99.50	0.69	2.00	0.08	S-100
	S-105	4 3/16	1/16	4.114	0.030	0.079	0.003	104.50	0.76	2.00	0.08	S-105
	S-110	4 6/16	1/16	4.311	0.030	0.079	0.003	109.50	0.76	2.00	0.08	S-110
	S-112	4 7/16	1/16	4.390	0.030	0.079	0.003	111.50	0.76	2.00	0.08	S-112
	S-115	4 9/16	1/16	4.508	0.030	0.079	0.003	114.50	0.76	2.00	0.08	S-115
	S-120	4 12/16	1/16	4.705	0.030	0.079	0.003	119.50	0.76	2.00	0.08	S-120
	S-125	5	1/16	4.902	0.037	0.079	0.003	124.50	0.94	2.00	0.08	S-125
	S-130	5 3/16	1/16	5.098	0.037	0.079	0.003	129.50	0.94	2.00	0.08	S-130
	S-132	5 4/16	1/16	5.177	0.037	0.079	0.003	131.50	0.94	2.00	0.08	S-132
	S-135	5 6/16	1/16	5.295	0.037	0.079	0.003	134.50	0.94	2.00	0.08	S-135
	S-140	5 9/16	1/16	5.492	0.037	0.079	0.003	139.50	0.94	2.00	0.08	S-140
	S-145	5 12/16	1/16	5.689	0.037	0.079	0.003	144.50	0.94	2.00	0.08	S-145
	S-150	6	1/16	5.886	0.037	0.079	0.003	149.50	0.94	2.00	0.08	S-150
	S-175	7	1/16	6.870	0.048	0.079	0.003	174.50	0.60	2.00	0.07	S-175

B2401 Dimensions

JIS B2401 is the Japanese Industrial Standard for O-rings.

Manufacturing the O-rings over than the in side diameter 20000mm by Maxmold Polymer Co., Ltd.

SIZE	Nominal(refer.)		Measurements in inches				Measurements in millimeters				SIZE
	ID	W	ID	+/-	W	+/-	ID	+/-	W	+/-	
17X3	11/16	2/16	0.669	0.005	0.118	0.005	17.0	1.25	3.0	0.13	17X3
19X3	12/16	2/16	0.748	0.005	0.118	0.005	19.0	1.25	3.0	0.13	19X3
20X3	13/16	2/16	0.787	0.006	0.118	0.005	20.0	1.25	3.0	0.13	20X3
22X3	14/16	2/16	0.866	0.006	0.118	0.005	22.0	1.25	3.0	0.13	22X3
23X3	15/16	2/16	0.906	0.006	0.118	0.005	23.0	1.25	3.0	0.13	23X3
27X3	1 1/16	2/16	1.063	0.007	0.118	0.005	27.0	1.25	3.0	0.13	27X3
28X3	1 2/16	2/16	1.102	0.008	0.118	0.005	28.0	1.25	3.0	0.13	28X3
29X3	1 3/16	2/16	1.142	0.008	0.118	0.005	29.0	1.30	3.0	0.13	29X3
35X3	1 6/16	2/16	1.378	0.010	0.118	0.005	35.0	1.30	3.0	0.13	35X3
42X3	1 11/16	2/16	1.654	0.012	0.118	0.005	42.0	1.30	3.0	0.13	42X3
44X3	1 12/16	2/16	1.732	0.012	0.118	0.005	44.0	1.30	3.0	0.13	44X3
45X3	1 13/16	2/16	1.772	0.012	0.118	0.005	45.0	1.38	3.0	0.13	45X3
48X3	1 15/16	2/16	1.890	0.013	0.118	0.005	48.0	1.46	3.0	0.13	48X3
52X3	2 1/16	2/16	2.047	0.014	0.118	0.005	52.0	1.46	3.0	0.13	52X3
53X3	2 2/16	2/16	2.087	0.015	0.118	0.005	53.0	1.46	3.0	0.13	53X3
58X3	2 5/16	2/16	2.283	0.016	0.118	0.005	58.0	1.51	3.0	0.13	58X3
68X3	2 12/16	2/16	2.677	0.019	0.118	0.005	68.0	1.61	3.0	0.13	68X3
128X3	5 2/16	2/16	5.039	0.035	0.118	0.005	128.0	2.76	3.0	0.13	128X3
150X3	6	2/16	5.906	0.041	0.118	0.005	150.0	2.86	3.0	0.13	150X3
155X3	6 3/16	2/16	6.102	0.043	0.118	0.005	155.0	2.02	3.0	0.13	155X3
160X3	6 6/16	2/16	6.299	0.044	0.118	0.005	160.0	2.02	3.0	0.13	160X3
165X3	6 10/16	2/16	6.496	0.045	0.118	0.005	165.0	2.02	3.0	0.13	165X3
170X3	6 13/16	2/16	6.693	0.047	0.118	0.005	170.0	2.02	3.0	0.13	170X3
175X3	7	2/16	6.890	0.048	0.118	0.005	175.0	2.02	3.0	0.13	175X3
180X3	7 3/16	2/16	7.087	0.050	0.118	0.005	180.0	2.14	3.0	0.13	180X3
185X3	7 6/16	2/16	7.283	0.051	0.118	0.005	185.0	2.14	3.0	0.13	185X3
190X3	7 10/16	2/16	7.480	0.052	0.118	0.005	190.0	2.14	3.0	0.13	190X3
195X3	7 13/16	2/16	7.677	0.054	0.118	0.005	195.0	2.14	3.0	0.13	195X3
200X3	8	2/16	7.874	0.055	0.118	0.005	200.0	2.14	3.0	0.13	200X3
210X3	8 6/16	2/16	8.268	0.058	0.118	0.005	210.0	2.27	3.0	0.13	210X3
215X3	8 10/16	2/16	8.465	0.059	0.118	0.005	215.0	2.27	3.0	0.13	215X3
220X3	8 13/16	2/16	8.661	0.061	0.118	0.005	220.0	2.27	3.0	0.13	220X3
225X3	9	2/16	8.858	0.062	0.118	0.005	225.0	2.27	3.0	0.13	225X3
230X3	9 3/16	2/16	9.055	0.063	0.118	0.005	230.0	2.27	3.0	0.13	230X3
235X3	9 6/16	2/16	9.252	0.065	0.118	0.005	235.0	2.40	3.0	0.13	235X3
240X3	9 10/16	2/16	9.449	0.066	0.118	0.005	240.0	2.40	3.0	0.13	240X3
245X3	9 13/16	2/16	9.646	0.068	0.118	0.005	245.0	2.40	3.0	0.13	245X3
250X3	10	2/16	9.843	0.069	0.118	0.005	250.0	2.40	3.0	0.13	250X3
255X3	10 3/16	2/16	10.039	0.070	0.118	0.005	255.0	2.40	3.0	0.13	255X3
260X3	10 6/16	2/16	10.236	0.072	0.118	0.005	260.0	2.40	3.0	0.13	260X3
265X3	10 10/16	2/16	10.433	0.073	0.118	0.005	265.0	2.40	3.0	0.13	265X3
270X3	10 13/16	2/16	10.630	0.074	0.118	0.005	270.0	2.65	3.0	0.13	270X3
275X3	11	2/16	10.827	0.076	0.118	0.005	275.0	2.65	3.0	0.13	275X3
280X3	11 3/16	2/16	11.024	0.077	0.118	0.005	280.0	2.65	3.0	0.13	280X3
285X3	11 6/16	2/16	11.220	0.079	0.118	0.005	285.0	2.65	3.0	0.13	285X3
290X3	11 10/16	2/16	11.417	0.080	0.118	0.005	290.0	2.65	3.0	0.13	290X3
295X3	11 13/16	2/16	11.614	0.081	0.118	0.005	295.0	2.65	3.0	0.13	295X3
300X3	12	2/16	11.811	0.083	0.118	0.005	300.0	2.65	3.0	0.13	300X3
330X3	13 3/16	2/16	12.992	0.091	0.118	0.005	330.0	2.65	3.0	0.13	330X3
350X3	14	2/16	13.780	0.096	0.118	0.005	350.0	2.65	3.0	0.13	350X3
370X3	14 13/16	2/16	14.567	0.102	0.118	0.005	370.0	2.65	3.0	0.13	370X3